



| | | | | | |
|-------------|-----------------|-----------------------------|--------------|-------------------|-------------|
| 5 | - | Soffione 220 saldato | 1 | VARI | 947.234 |
| 4 | - | Sfera per snodo soffione | 1 | CW614N-M_EN-12164 | 56.611 |
| 3 | - | O-Ring 3.53x17.04 | 1 | NBR | 0.949 |
| 2 | - | Guarnizione con filtro G1/2 | 1 | NBR | 0.395 |
| 1 | - | Calotta per snodo soffione | 1 | CW614N-M_EN-12164 | 32.784 |
| Pos. | Dis. nr. | Descrizione | Q.ta' | Materiale | Peso |

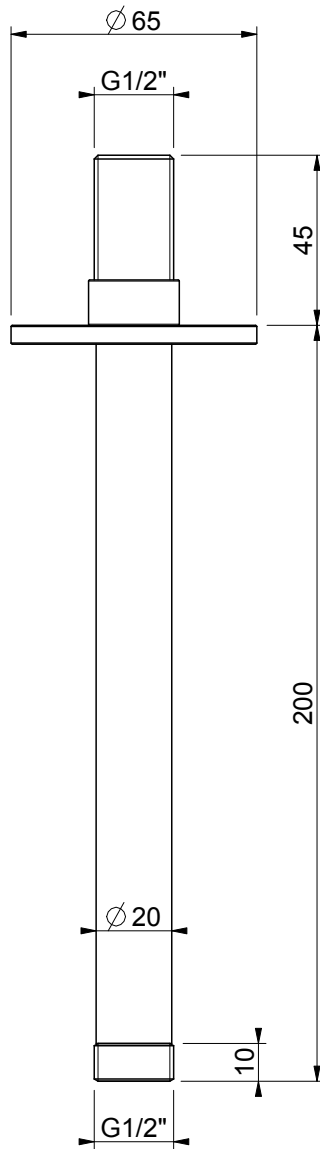

| | | | | | |
|-------------|-----------------|--|--------------|-----------------------|-------------|
| 8 | V029028 | Guarnizione in fibra G1/2 | 1 | FASIT202 | 0.963 |
| 7 | V017020 | O-Ring corda 1.78x18.77 (T2-018) | 1 | EPDM | 1.359 |
| 6 | V017002 | O-Ring corda 1.78x12.42 | 2 | NBR | 0.167 |
| 5 | P024___ | Tubo braccio doccia 20x2.5 | 1 | ACCIAIO_INOX | 201.468 |
| 4 | P024___ | Rosone per bocche d.20 esterno d.65 | 1 | ACCIAIO_INOX_AISI_303 | 95.121 |
| 3 | P024___ | Raccordo M16.5x1 M - G1/2 M | 1 | CW614N_EN12164 | 23.032 |
| 2 | P006058 | Gambo filettato G1/2 per canna lavabo tre fori COLEMAN | 1 | CW614N-M_EN-12164 | 74.785 |
| 1 | P003398 | Raccordo M16.5x1 M - G1/2 F | 1 | CW614N_EN12164 | 27.812 |
| Pos. | Dis. nr. | Descrizione | Q.ta' | Materiale | Peso |

